MP 32 DL

Alimentatori elettronici multicorrente in corrente continua per power LED
Direct current electronic drivers multicurrent for power LED

PENDING PENDING SELV

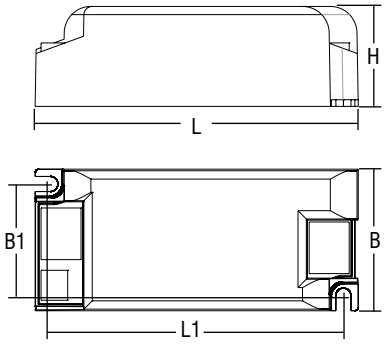

NEW

LED LED

Available from 3RD quarter 2012

Articolo Article	Codice Code	W	V out DC	I out DC	n° LED max. @ 230 V	ta °C	tc °C	λ max.	Dimensioni - Dimensions (mm)					Peso Weight gr.	Pezzi Pcs
									L	L1	B	B1	H		
Uscita in corrente costante - Constant current output															
MP 32 DL	122216	11	10÷45	250mA cost.	11/12	-25 +50	80	0,95	97	88	42,5	33,5	30	-	30
		13	10÷45	300mA cost.	11/12										
		16	10÷45	350mA cost.	11/12										
		18	10÷45	400mA cost.	11/12										
		20	10÷45	450mA cost.	11/12										
		22	10÷45	500mA cost.	11/12										
		25	10÷45	550mA cost.	11/12										
		27	10÷45	600mA cost.	11/12										
		29	10÷45	650mA cost.	11/12										
		32	10÷45	700mA cost.	11/12										
		32	10÷42	750mA cost.	11/12										
		32	10÷40	800mA cost.	10/11										
		32	10÷38	850mA cost.	10/11										
		32	10÷36	900mA cost.	9/10										
		32	10÷34	950mA cost.	8/9										
		32	10÷30	1000mA cost.	8/9										

Norme di riferimento
Reference Norms:
EN 50172 (VDE 0108)
EN 55015
EN 61000-3-2
EN 61347-1
EN 61347-2-13
EN 61547
VDE 0710-T14

Lampade
Lamps:
Power LED

Tensione Nominale
Rated Voltage
220 ÷ 240 V

Frequenza
Frequency
50...60 Hz

Tensione di utilizzo AC
AC Operation range
198 ÷ 264 V

Tensione di utilizzo DC
DC Operation range
176 ÷ 264 V

Potenza
Power
3 ÷ 32 W

- Alimentatore da incorporare per uso interno.
- Alimentatore multipotenza fornito di dip-switch per la selezione della corrente in uscita.
- PFC attivo.
- Entrata analogica (NTC) per connessione sensore termico.
- Corrente regolata ±5% incluse variazioni di temperatura.
- Morsetti di entrata e uscita contrapposti (sezione morsetti 1,5 mm²).
- Fissaggio dell'alimentatore tramite asole per viti.
- Protezioni:
  - termica e cortocircuito;
  - contro le extra-tensioni di rete;
  - contro i sovraccarichi.
- Protezione termica = C.5.a.
- Non è possibile l'accensione e spegnimento sul secondario per LED alimentati in corrente (power LED).

- Built-in driver for indoor use.
- Multi-power driver supplied with dip-switch for the selection of the output current.
- Active Power Factor Corrector.
- Analogical input (NTC) for thermal sensor connection.
- Current regulation ±5% including temperature variations.
- Input and output terminal blocks on opposite sides (terminal area 1,5 mm²).
- Driver can be secured with slot for screws.
- Protections:
  - against overheating and short circuits;
  - against mains voltage spikes;
  - against overloads.
- Thermal protection = C.5.a.
- Can't be switched on and off on secondary circuit for power LED.